




kr , - Pris peisinnsetts m/glasshøyde 45

kr , - Pris peisinnsetts m/glasshøyde 51

kr , - Pris peisinnsetts m/glasshøyde 57

- Standard farge brennkammer: Hvit
- Kristallglasstrykk
- Heve-senkedør
- Tillegg/valg:
 - Pynteramme
 - Brannkammer i sort
 - Dobbelglass

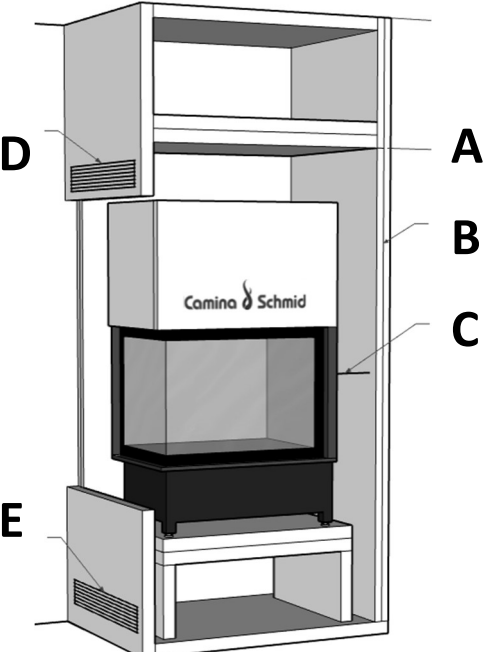


The diagram shows a side view of the fireplace with the following labels:


- A**: Distance to brickwork above the top of the unit.
- B**: Thickness of the brickwork above the unit.
- C**: Distance to brickwork behind the unit.
- D**: Minimum air opening above the unit.
- E**: Minimum air opening below the unit.

Teknisk data:

- B*D*H, glass: 100*(45, 51 eller 57 cm)
- Effekt: 3,2 – 10,9 kW
- Vekt: 310 – 350 kg
- Røykrør dimensjon: Ø200 mm
- Friskluftstuss: Ø150 mm
- Energiklasse: A
- Virkningsgrad: 78%
- Avstand til brannmursplate, tak: 500 mm (A)
- Brannmursplate-tykkelse, min. krav: 60 mm (B)
- Avstand til brannmursplate, bak: 100 mm (C)
- Møbleringsavstand: 800 mm
- Min arealåpning luft, over innsats: 1560 cm² (D)
- Min arealåpning luft, under innsats: 1300cm² (E)

Ramme til Ekko:

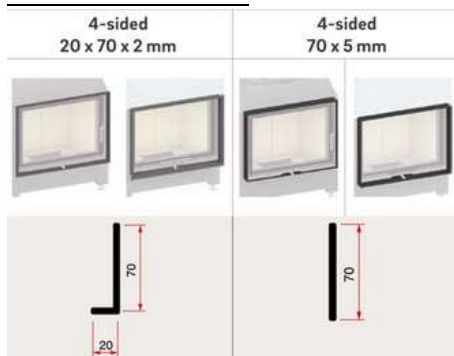

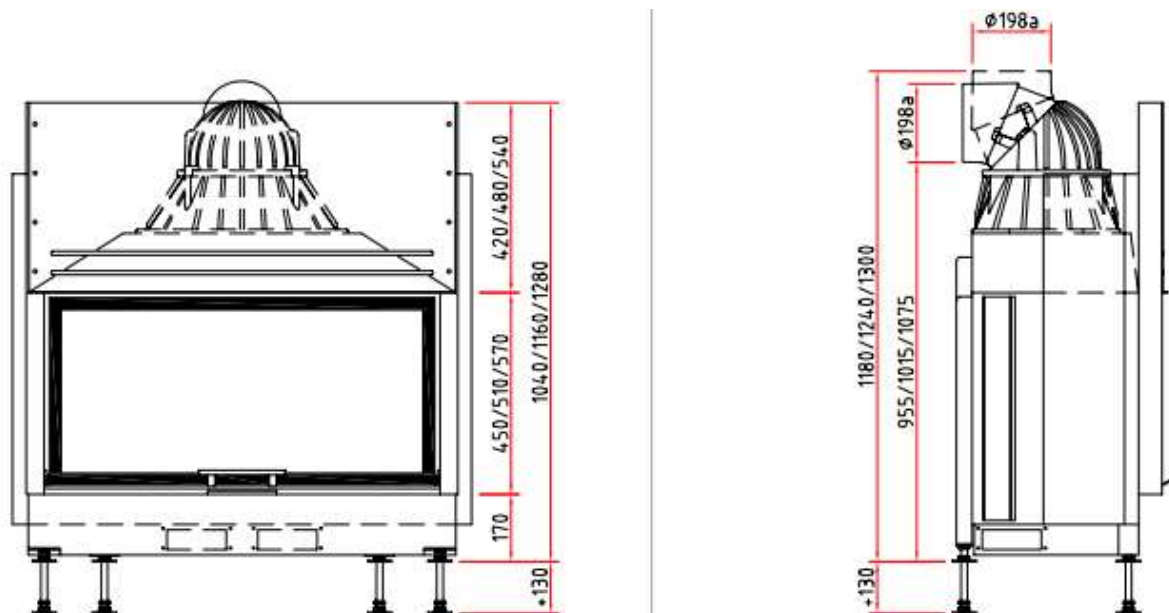

Draufsicht M 1:10

